


Rain Bird® SQ Series, Square Pattern Nozzles and Poly Flex Riser Adapter

The Smart Solution for Smaller Spaces

Rain Bird's new flush-mount SQ Series, Square Pattern Nozzle is the most precise and efficient, commercial-grade, low-volume spray solution for irrigation of small areas with dense plantings. The SQ looks like any MPR nozzle and installs on most common spray heads. It adjusts from 2.5' square to 4' square pattern in a single click.

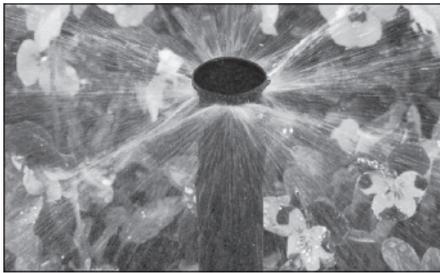

SQ Features

- Commercial-grade pressure compensating nozzle
- Available in 3 models
 - SQ-QTR – Quarter pattern (90° square)
 - SQ-HLF – Half pattern (180° square)
 - SQ-FUL – Full pattern (360° square).
- Compatible with all 1800® Series, Xeri-Pop Series, PFR Adapter, UNI-Spray Series and SCH 80 risers.
- Shipped with blue filter screen (.02 x .02) to maintain precise throw and prevent clogging.
- Virtual no-mist performance from 20 to 50 psi.
- 2 throw distance options in each nozzle. One click lets you adjust from 2.5' to 4' (0,8m to 1,2m).
- Poly Flex Riser Adapter sold with either 12" or 24" Poly Flex Riser.
- Patent-pending.



Pressure Compensating/ Commercial Grade

Unlike conventional micro-sprays, Rain Bird's patent-pending SQ is pressure compensating, commercial grade, and virtually mist-free – even at the maximum operating pressure. This ensures optimum coverage for non-turf applications from 20 to 50 psi.

One Nozzle...Two Throws

The SQ is the only edge to edge capable nozzle on the market delivering superior soil moisture content and uniformity. The patent-pending design provides the designer and the installer with the option of 2.5' or 4' throws in a quarter, half or full square pattern. The SQ threads onto any standard 1/2" MPT connection or, for added versatility, use the patent-pending PFR Adapter.




SQ installed on a Poly Flex Riser Assembly using PFR Adapter



SQ Poly Flex Riser Adapter

How to Specify/Order:

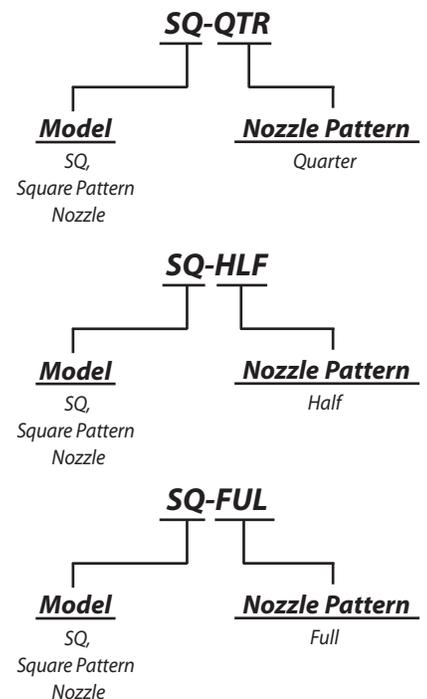



Specifications


SQ Series, Square Pattern Nozzle

The nozzle shall have matched precipitation rates for each model. The nozzle shall be capable of covering a _____(ft.)/(meter) radius at _____(psi)/(bars) with a discharge rate of _____(GPM)/(m³/h).

The SQ is intended for use with the 1800 Series, Xeri-Pop Series, PFR Adapter, UNI-Spray Series or SCH 80 risers. The SQ is constructed of UV resistant ABS plastic. The SQ shall be pressure compensating and factory manufactured by Rain Bird Corporation, Azusa, CA.

The Poly Flex Riser Adapter

The Poly Flex Riser Adapter shall be molded of ABS plastic material. The PFR Adapter shall be designed to fit onto either a 12" or 24" Poly Flex Riser Assembly.

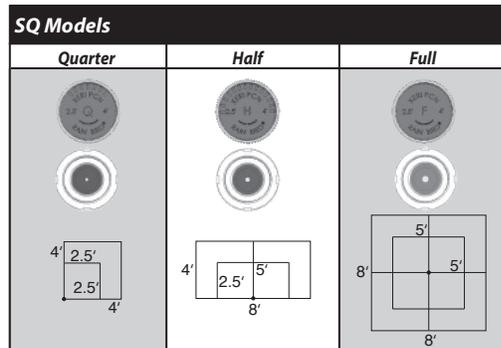

SQ Performance				
2.5 feet throw @ 6" height above grade				
Nozzle	Pressure psi	Throw Radius ft.	Flow GPH	Precip. Rate w/no overlap in/h
Q	20	2.5	6.4	1.64
	30	2.5	7.4	1.90
	40	3.0	7.4	1.32
	50	3.0	7.4	1.32
H	20	2.5	10.2	1.31
	30	2.5	12.2	1.57
	40	3.0	13.7	1.22
	50	3.0	13.7	1.22
F	20	2.5	20.0	1.28
	30	2.5	24.2	1.55
	40	3.0	27.3	1.22
	50	3.0	27.3	1.22

SQ Performance				METRIC
0,8 m throw @ 0,15 m height above grade				Precip. Rate w/no overlap mm/h
Nozzle	Pressure bars	Throw Radius m.	Flow LPH	
Q	1,4	0,8	24	42
	2,1	0,8	28	48
	2,8	0,9	28	34
	3,4	0,9	28	34
H	1,4	0,8	39	33
	2,1	0,8	46	40
	2,8	0,9	52	31
	3,4	0,9	52	31
F	1,4	0,8	76	33
	2,1	0,8	92	39
	2,8	0,9	103	31
	3,4	0,9	103	31

SQ Performance				
4 feet throw @ 6" height above grade				
Nozzle	Pressure psi	Throw Radius ft.	Flow GPH	Precip. Rate w/no overlap in/h
Q	20	4.0	6.4	0.64
	30	4.0	7.4	0.74
	40	4.5	7.4	0.59
	50	4.5	7.4	0.59
H	20	4.0	10.2	0.51
	30	4.0	12.2	0.61
	40	4.5	13.7	0.54
	50	4.5	13.7	0.54
F	20	4.0	20.0	0.50
	30	4.0	24.2	0.61
	40	4.5	27.3	0.54
	50	4.5	27.3	0.54

SQ Performance				METRIC
1,2 m throw @ 0,15 m height above grade				Precip. Rate w/no overlap mm/h
Nozzle	Pressure bars	Throw Radius m.	Flow LPH	
Q	1,4	1,2	6	16
	2,1	1,2	7	19
	2,8	1,4	7	15
	3,4	1,4	7	15
H	1,4	1,2	10	13
	2,1	1,2	12	16
	2,8	1,4	14	14
	3,4	1,4	14	14
F	1,4	1,2	20	13
	2,1	1,2	24	15
	2,8	1,4	27	14
	3,4	1,4	27	14

Performance data taken in zero wind conditions.

Rain Bird Corporation

6991 E. Southpoint Road, Tucson, AZ, 85706
Phone: (520) 741-6100 Fax: (520) 741-6522

Rain Bird Corporation

970 W. Sierra Madre Avenue, Azusa, CA, 91702
Phone: (626) 812-3400 Fax: (626) 812-3411

Rain Bird International, Inc.

P.O. Box 37, Glendora, CA, 91740-0037
Phone: (626) 963-9311 Fax: (626) 852-7343

Rain Bird Technical Services

(800) RAINBIRD (U.S. and Canada)

Specification Hotline

(800) 458-3005 (U.S. and Canada)

www.rainbird.com

The Intelligent Use of Water™ — Visit www.rainbird.com to learn about our efforts

® Registered trademark of Rain Bird Corporation
© 2007 Rain Bird Corporation 3/07