

# Hunter





## XC marks the spot!

Forget following that winding trail to find an accessible outlet. Hunter Industries' new XC Hybrid Controller brings you the power without the plug. With all the great water management features of the XC Controller, the new XC Hybrid operates DC latching solenoids with battery power. Ready for outdoor or indoor installation, the XC Hybrid comes in 4, 6, 8, 10, and 12 station models, meaning it is your solution for a wide range of residential and commercial applications. Small residential areas, parks, gardens, roadway medians, and roundabouts are ready for the XC Hybrid. Presenting Hunter. Unplugged.





Same features as the XC controller, but operates on battery power.

 GLOBAL SEASONAL ADJUSTMENT (0% TO 150%)

Simple on-screen adjustment modulates watering to accommodate changing weather conditions.

THREE INDEPENDENT PROGRAMSWITH FOUR START TIMES EACH

Enables a wide range of watering requirements. Independence for all.

INDEPENDENT DAY
SCHEDULING CHOICE

Max out your watering flexibility.
Select days of the week, true
odd/even or interval watering.

**BATTERY OPERATED** 

Uses batteries or an optional 24 VAC plug-in transformer utilizing DC latching solenoids.

## **NON-VOLATILE MEMORY**

Excellent insurance against unreliable power; retains current time, day, and program data.

## **WEATHER SENSOR COMPATIBLE**


Incorporates hook-up capability to rain, temperature and wind sensors, programmable by station.

### **EASY-RETRIEVE MEMORY**

The ability to retrieve your preferred program, stored in backup memory.

## RUGGED OUTDOOR CABINET DESIGN

Ideal for both indoor and outdoor use, with models in 4, 6, 8, 10, and 12 station configurations. (Stainless version available in 6 and 12 station configurations only.)

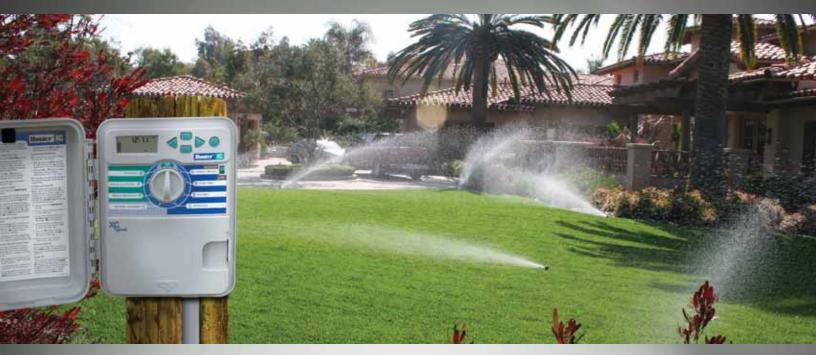



XCH-400 – 4-station indoor/outdoor controller XCH-600 – 6-station indoor/outdoor controller XCH-800 - 8-station indoor/outdoor controller XCH-1000 – 0-station indoor/outdoor controller
XCH-1000 – 10-station indoor/outdoor controller
XCH-1200 – 12-station indoor/outdoor controller
XCH-600-SS – 6-station indoor/outdoor controller, stainless
XCH-1200-SS – 12-station indoor/outdoor controller, stainless

- 8-5/8" H x 7" W x 3-3/4" D XC Hybrid
   9-1/2" H x 7-1/2" W x 4" D XC Hybrid Stainless

## **SPECIFICATIONS & FEATURES**

- Includes all the features and specifications of the XC controller
- Power Source: 6 AA batteries (XCH), 6 C batteries (XCH Stainless), or 24 VAC (optional)
   Operates DC Latching Solenoids only (p/n 458200)

- 120/24 VAC Transformer US (p/n 526500)
  230/24 VAC Transformer European (p/n 545700)
  240/24 VAC Transformer Australian (p/n 545500)

## **SPECIFICATION BUILDER**

## MODEL

## **FEATURES**

хсн

XCH 600

EXAMPLE

**XCH-600** 

## **Maximum Wire Run**

18 AWG	500'
16 AWG	800'
14 AWG	1,300'
12 AWG	2 000'

\* Use DC-Latching solenoids only.

